

VB552

Media Distribution Solution VGA Over Cat 5 Repeater +Audio

- The VB552 VGA Over Cat 5 Repeater +Audio is an audio/video signal extension device which is compatible with ATEN Cat 5 Audio/Video splitters. The VB552 extends the audio/video transmission range an extra 150m over Cat 5e (or higher) cables. The use of an additional repeater means the audio/video signals can be transmitted over even longer distances, up to 450m.

Furthermore, for longer distance installations where video signals may degrade, the VB552 has adjustable video gain and compensation controls to provide the sharpest video quality possible. An IR remote control also provides picture control at the remote site.

Wall-mountable, with a RS-232 channels on the unit for selection, and support for high video resolutions, the VB552 is the perfect solution to extend the range of your A/V and serial transmissions in any installation environment requiring VESA FDMI mount standards.





IR Remote Control Included

Features

- Uses Cat 5e cable to extend audio/video signal
- Extends the transmission range an extra 150m
- High-quality video – up to 1920x1200@60Hz at 30m, 1600x1200@60Hz at 150m, 1280x1024@60Hz at 200m
- Audio and serial enabled
- Two gain control modes for sharpest picture quality
- Video gain and compensation adjustable via OSD
- IR receiver for quick and easy video quality adjustment
- IR remote control for screen on/off and video adjustment at remote site
- Provides a RS-232 channels for selection*
- Follows VESA FDMI mount standard
- Supports DDC for the local monitor
- Supports VGA, SVGA, XGA, SXGA, UXGA and multisync monitors

* Only one RS-232 channel can be selected at a time.

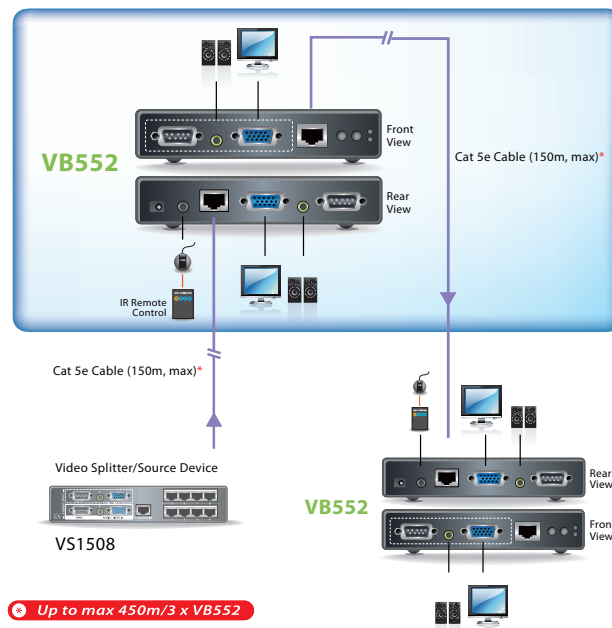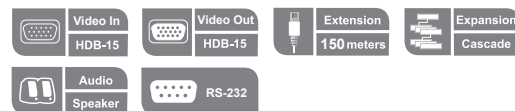

Specification

Function		VB552
Connectors	Video Out 1	1 x HDB-15 Female (Blue)
	Video Out 2	1 x HDB-15 Female (Blue)
	Audio Out 1	1 x Mini Stereo Jack Female (Green)
	Audio Out 2	1 x Mini Stereo Jack Female (Green)
	RS-232 1	1 x DB-9 Male (Black)
	RS-232 2	1 x DB-9 Male (Black)
	IR Jack	1 x Mini Stereo Jack Female (Black)
	Power	1 x DC Jack
Switches	Unit to Unit	2 x RJ-45 Female
	Video Gain/Up	1 x Pushbutton
	Video Compensation/Down	1 x Pushbutton
LEDS	Power	1 (Orange)
	On Line	1 (Green)
Video		1920x1200@60Hz at 30m, 1600x1200@60Hz at 150m, 1280x1024@60Hz at 200m
Cable Distance		150 m
Power Consumption		DC5.3V, 4.77W
Environment	Operating Temp.	0-50°C
	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
Physical	Housing	Metal
	Weight	0.35 kg
Properties		Dimensions (L x W x H) 13.90 x 8.03 x 2.86 cm

* The specifications and pictures are subject to change without notice.

